


In-Line Lubricators

TX-2L

TX-3L

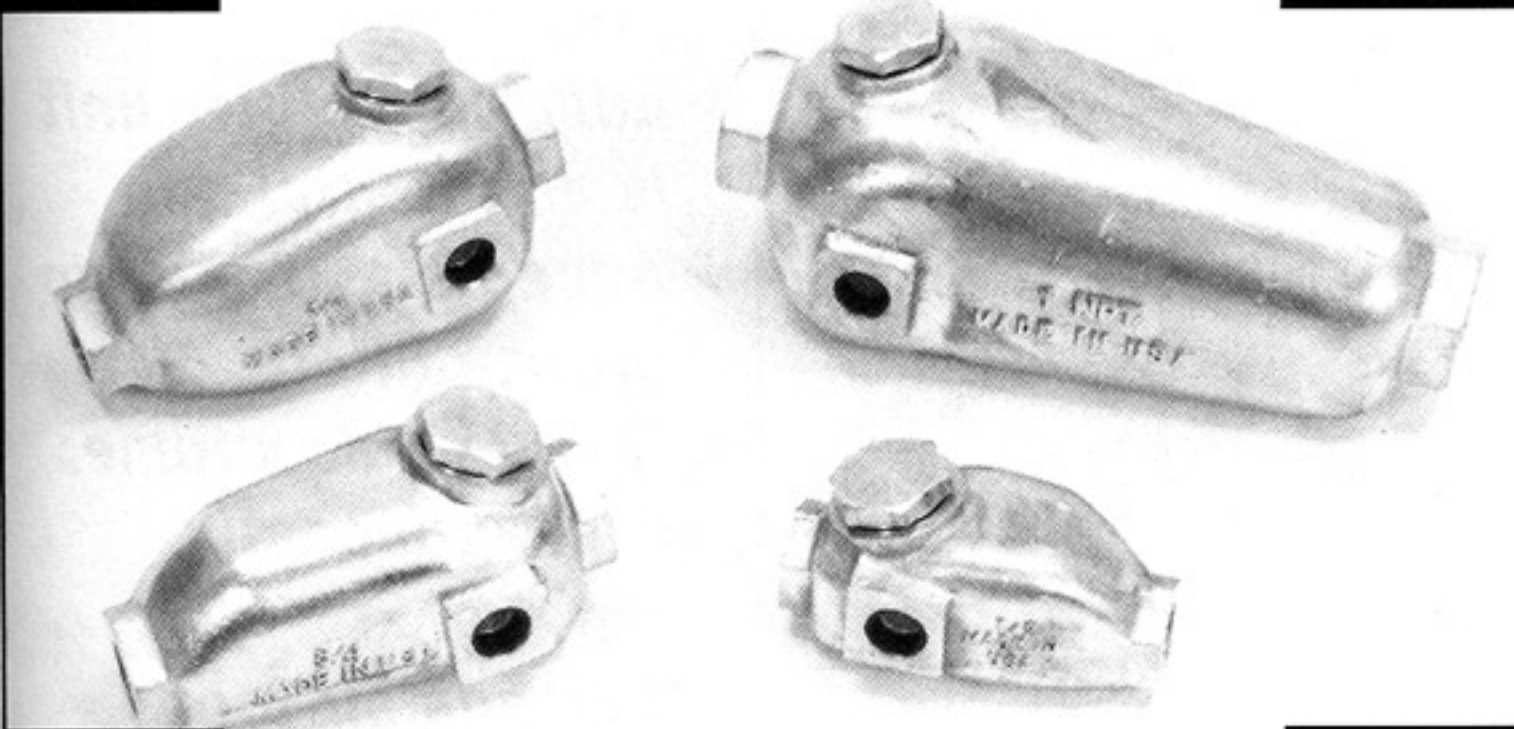

TX-1L

TX-0L

These are heavy-duty in-line lubricators to be installed 6-8 feet from tool. Designed for use with tools being used too far away from compressor to be lubricated by a permanently mounted unit.

These lubricators can be used on everything from an air scribe to a paving breaker.

- ★ Use lubricators to save money and eliminate repairs.
- ★ Use lubricators to eliminate costly downtime.
- ★ All mechanical apparatus need lubrication.
- ★ Absolute must for improved tool life.
- ★ Metering valve for adjusting oil flow.
- ★ Repair kits available.
- ★ Sight disk in housing to visually inspect oil level.

SPECIFICATIONS:

MODEL #	CAPACITY	HOSE BARB PIPE SIZE	WT.	MAX. WORKING PRESSURE	BOXED WT.	OIL WT. REC.
TX-0L	1.4 FL. OZ.	1/2" NPT	1.5	500	1.25	10 WT.
TX-1L	3.7 FL. OZ.	3/4" NPT	1.55	260	1.75	10 WT.
TX-2L	11.0 FL. OZ.	3/4" NPT	2.40	300	2.65	10 WT.
TX-3L	16.0 FL. OZ.	1" NPT	4.35	250	4.76	10 WT.

Used in Texas
Pneumatic's
TX-HW series
hose whip
assemblies.

AIR FLOW CAPACITY AT 70 PSI


TX-0L 30 CFM	TX-1L 70 CFM	TX-2L 70 CFM	TX-3L 150 CFM
-----------------	-----------------	-----------------	------------------

Pressure Relief
Caps available

Constant Feed
models available

In-Line Filter Lubricators

TX-0L-F / TX-1L-F

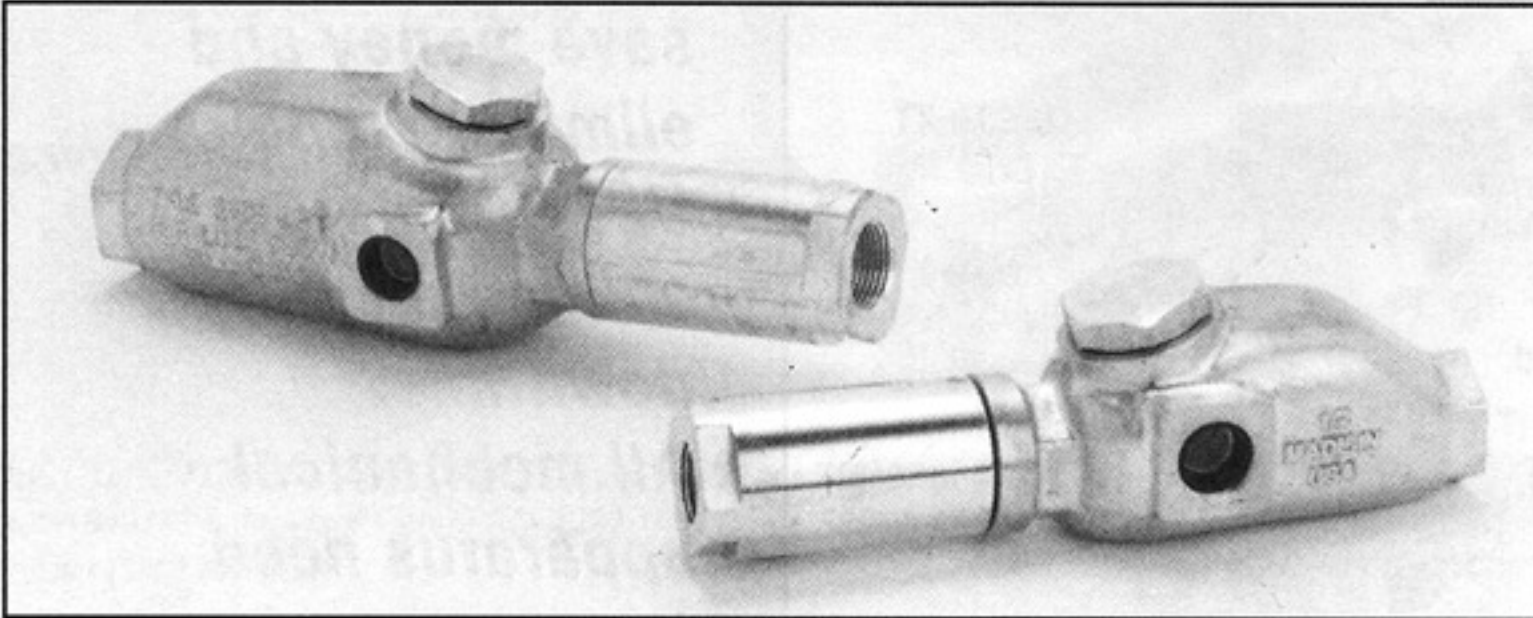

These filter lubricators can be used on:

*Pneumatic Hammers
Impact Wrenches
Nut Runners
Grinders
Air Screw Drivers*

One of the most common repairs an air tool undergoes is disassembly to clean foreign material out of the valve assembly. In-Line Filter Lubricators help prevent this from happening. The 40 micron filter can easily be cleaned or replaced.

- ★ *Lubricator filter unit is an integral unit.*
- ★ *Accepts a 40 micron bronze filter.*
- ★ *Reduces downtime.*
- ★ *Prevents costly repairs.*
- ★ *Extends air tool life.*
- ★ *Casting design prevents breakage where a nipple has been used to connect filter to lubricator.*
- ★ *Adjustable metering valve.*
- ★ *Sight disk in housing to visually inspect oil level.*

SPECIFICATIONS:

MODEL #	CAPACITY	HOSE BARB PIPE SIZE	MAX. WORKING PRESSURE	OIL WT. REC.
TX-0L-F	1.4 FL. OZ.	1/2" NPT	500	10 WT.
TX-1L-F	3.7 FL. OZ.	3/4" NPT	260	10 WT.

*Used in Texas
Pneumatic's
TX-HW-F series
hose whip
assemblies.*

AIR FLOW CAPACITY AT 70 PSI

TX-0L-F
30 CFM

TX-1L-F
70 CFM